





GORMAN-RUPP PUMPS

SEWAGE PUMPING STATIONS

BELOW GROUND

Gorman-Rupp's below ground stations, with their inconspicuous low-silhouette entrance tube, are widely used in residential areas. The fiberglass enclosures accommodate pump configurations sized to meet your pumping requirements. Depending on pump model, pumps are available in 3", 4", 6", 8" and 10" sizes with flows from 50 to 3200 GPM on single-pump operation.

Gorman-Rupp Super T Series® or Ultra V Series® self-priming pumps allow for a more shallow burial than most other pumps. This capability can save up to 25 feet of digging and greatly reduce installation costs, as well as the need for elevators and/or platforms.

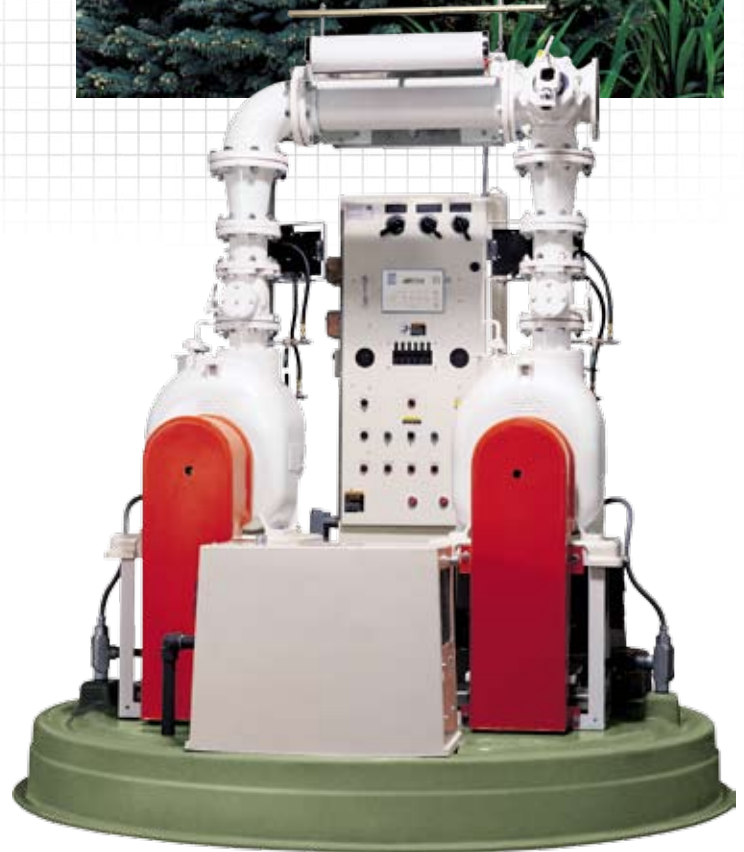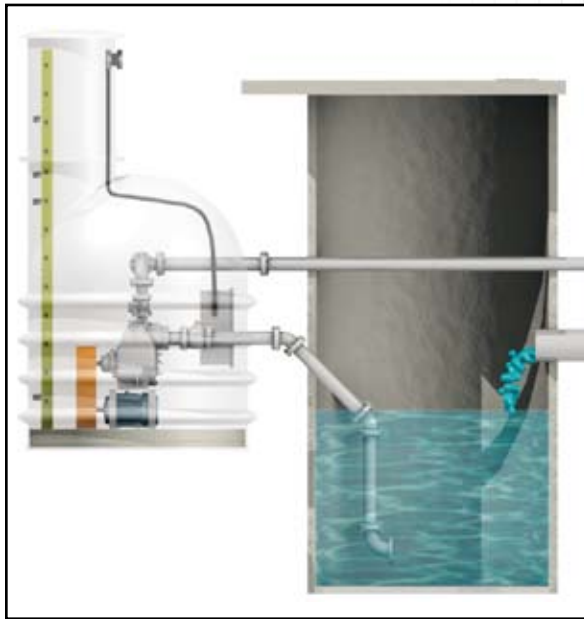

THE GORMAN-RUPP COMPANY, MANSFIELD DIVISION | P.O. Box 1217, Mansfield, Ohio 44901-1217, USA • Tel: 419-755-1011 • Fax: 419-755-1208 • E-mail: grsales@gormanrupp.com
GORMAN-RUPP INTERNATIONAL | P.O. Box 1217, Mansfield, Ohio 44901-1217, USA • Tel: 419-755-1011 • Fax: 419-755-1266 • E-mail: intsales@gormanrupp.com
GORMAN-RUPP OF CANADA, LTD. | 70 Burwell Road, St. Thomas, Ontario N5P 3R7, Canada • Tel: 519-631-2870 • Fax: 519-631-4624 • E-mail: grcanada@grcanada.com

GRpumps.com

©2008 The Gorman-Rupp Company. All rights reserved. Printed in the USA. Product information is subject to change; consult factory for details.

