INDUSTRIAL

CONSTRUCTION / RENTAL

MINING

PETROLEUM

AGRICULTURE



80 Series® Heavy-Duty Self-Priming Centrifugal Pumps



## 80 SERIES®

## Heavy-Duty Self-Priming Centrifugal Pumps



Gorman-Rupp 80 Series® medium head, mild solids-handling, selfpriming centrifugal pumps are designed for non-stop work loads.

The straight-in-suction design of these high efficiency pumps guarantees quick positive priming and allows them to operate at higher

suction levels than most other self-priming centrifugal pumps.

The liquid being pumped enters directly into the eye of the impeller, and a suction check valve prevents in-line return flow when the pump is shut off

And, because they have few moving parts, 80 Series® pumps are easy to maintain and service, saving money in the long run.

### **High-Efficiency Impeller**

80 Series pumps come equipped with a multi-vane, open impeller for higher efficiencies. Depending on the model, the impeller design will handle up to 2½" solids. These pumps are perfect for mild-solids handling, medium head applications.



## **Multiple Seal Options**


80 Series pumps are standard with mechanical shaft seals. Grease and gland seals are also available depending on the pumping application. Consult factory for details.



## **Replaceable Wearplate**

The replaceable wearplate is vital in ensuring the pump is operating at peak efficiency around the clock and eliminates the need to replace expensive castings. Wearplates are of extra-thick construction allowing for an extended service life.



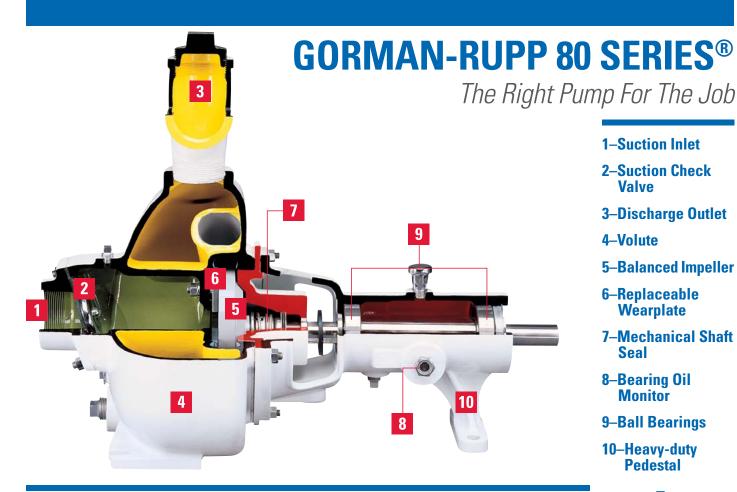

#### 1-Suction Inlet

- 2-Suction Check Valve
- 3-Discharge Outlet
- 4-Volute
- **5–Balanced Impeller**
- 6-Replaceable Wearplate
- 7-Mechanical Shaft Seal
- 8-Bearing Oil Monitor
- 9-Ball Bearings
- 10-Heavy-duty Pedestal

## Drive Variations ots



Basic pump

Size: 1¼" (30 mm) to 10" (250 mm) Max Capacity: 2800 GPM (176.7 lps) Max Head: 210' (64.0 m) Max Solids: 2.5" (63.5 mm) Seal Elastomer: Viton® Material of Construction: Gray Iron (consult factory for other metals available)



#### 80 Series®

Close-coupled Shown with explosion-proof motor

Max Capacity: 91 GPM (5.7 lps) Max Head: 72' (21.9 m) Seal Elastomer: Viton® Material of Construction: Gray Iron

Size: 11/4" (30 mm) to 11/2" (38 mm)



#### 80 Series®

Engine driven

Size: 11/4" (30 mm) to 10" (250 mm) Max Capacity: 2800 GPM (176.7 lps) Max Head: 210' (64.0 m) Max Solids: 2.5" (63.5 mm) Seal Elastomer: Viton® Material of Construction: Gray Iron (consult factory for other metals available)



#### 80 Series®

Shield-A-Spark portable engine driven

Size: 2" (50 mm) to 3" (75 mm) Max Capacity: 395 GPM (24.9 lps) Max Head: 140' (42.7 m) Seal Elastomer: Viton® Material of Construction: Aluminum Engines: Gasoline, Diesel




OTS noted models are included in the Gorman-Rupp OTS pump program. These products are available anytime, anywhere.


\*Viton® is a registered trademark of DuPont Performance Elastomers. All riahts reserved.

## **Pump Performance Data**

1¼" to 2" Models



#### 3" to 10" Models



# FLUID-HANDLING EQUIPMENT DESIGNED WITH YOUR NEEDS IN MIND



Engineering and manufacturing superiority has been the hallmark of Gorman-Rupp since our inception in 1933. Today we bring our products to life in some of the most efficient, modern and state-of-the-art manufacturing facilities in the world. Gorman-Rupp has a selection of nearly 3,000 pump models, and our world-class team of distributors has worked closely with thousands of end users around the world. We have the proven expertise and the resources to specify, manufacture, test and service your pump, and to ensure reliable performance for the long haul.





#### **GORMAN-RUPP PUMPS**

P.O. BOX 1217 MANSFIELD, OHIO 44901-1217 | USA TEL: 419.755.1011 | FAX: 419.755.1251

**GRPUMPS.COM** 

